

# CERAFIL® (Filters/Traps/Discriminators) for Audio/Visual Equipment




## CERAFIL® 10.7MHz Narrow Bandwidth Type


### ■ Features

SFELA10M7LFTA/KAH0, SFVLA/SFKLA series realizes narrower band characteristics not obtained by conventional ceramic filters. Besides, low spurious and temperature characteristics are stable. This series is suitable for European car-audio or AM up conversion use that needs narrow band characteristics.


9




SFVLA10M7MF00-B0

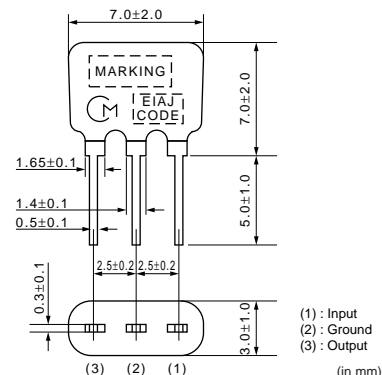

(1) : Input  
(2) : Ground  
(3) : Output  
(in mm)




SFVLA10M7LF00-B0

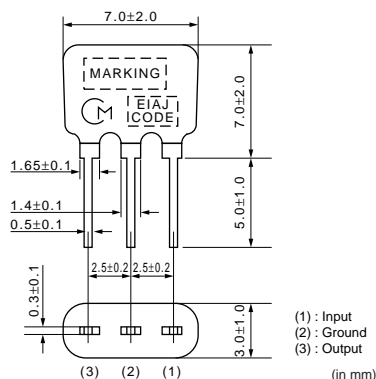

(1) : Input  
(2) : Ground  
(3) : Output  
(in mm)




SFKLA10M7NL00-B0

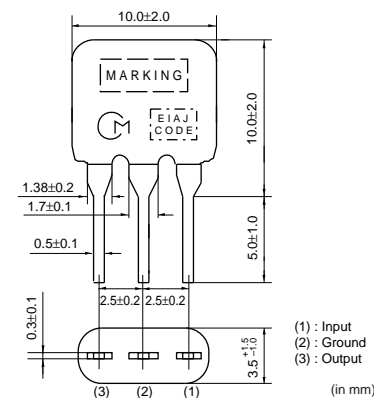

(1) : Input  
(2) : Ground  
(3) : Output  
(in mm)




SFELA10M7LFTA-B0

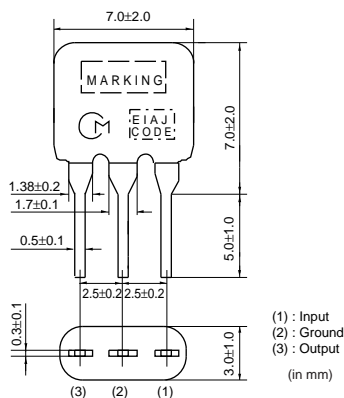

(1) : Input  
(2) : Ground  
(3) : Output  
(in mm)



SFELA10M7KAH0-B0

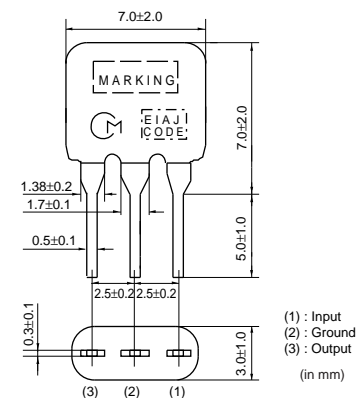

(1) : Input  
(2) : Ground  
(3) : Output  
(in mm)

Part Number	Center Frequency (fo) (MHz)	Nominal Center Frequency (fn) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)	Input/Output Impedance (ohm)
SFVLA10M7MF00-B0	-	10.700	fn±13 min.	135 max.	5.0 ±2.0dB	35 min.	330
SFVLA10M7LF00-B0	-	10.700	fn±25 min.	-	5.5 ±2.5dB	30 min.	330
SFKLA10M7NL00-B0	10.700 ±15kHz	-	20 min.	95 max.	6.0 max.	24 min.	600
SFELA10M7LFTA-B0	-	10.700	fn±25 min.	280 max.	7.0 ±2.0dB	30 min.	330
SFELA10M7KAH0-B0	10.700 ±30kHz	-	110 ±30kHz	350 max.	7.0 ±2.0dB	30 min.	330

Attenuation Bandwidth : at 20dB loss point Area of Spurious Attenuation : [within 9MHz to 12MHz]

Insertion Loss: at minimum loss point


Center frequency (fo) defined by the center of 3dB bandwidth.

The order quantity should be an integral multiple of the "Minimum Quantity" shown in the package page.

### ■ Standard Center Frequency Rank Code (SFELA10M7KAH0-B0)

CODE	30kHz Step	25kHz Step	Color Code
<b>D</b>	10.64MHz±30kHz	10.650MHz±25kHz	Black
<b>B</b>	10.67MHz±30kHz	10.675MHz±25kHz	Blue
<b>A</b>	10.70MHz±30kHz	10.700MHz±25kHz	Red
<b>C</b>	10.73MHz±30kHz	10.725MHz±25kHz	Orange
<b>E</b>	10.76MHz±30kHz	10.750MHz±25kHz	White
<b>Z</b>	Combination A,B,C,D,E		
<b>M</b>	Combination A,B,C		


### ■ Test Circuit

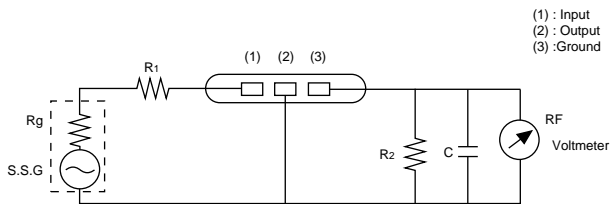


$R_g + R_1 = R_2 =$  Input and Output Impedance  
 $C = 10\text{pF}$  (Including stray capacitance and input capacitance of RF voltmeter.)

### ■ Frequency Characteristics


SFVLA10M7MF00-B0

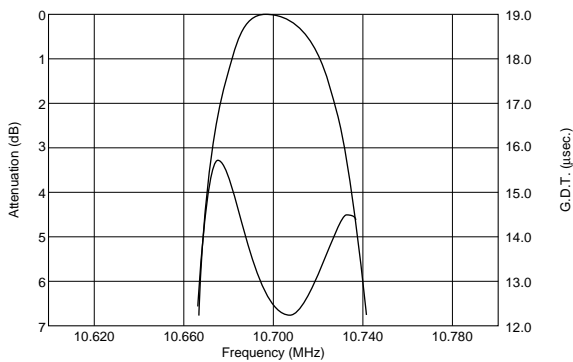


SFVLA10M7LF00-B0

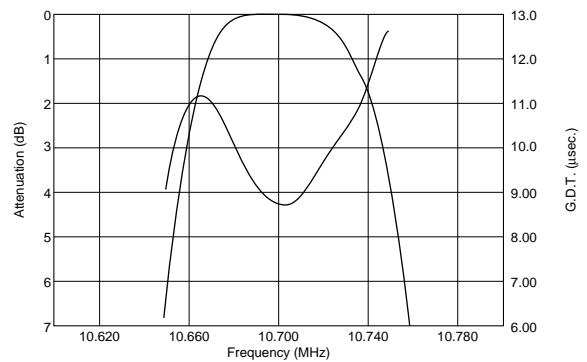

SFKLA10M7NL00-B0

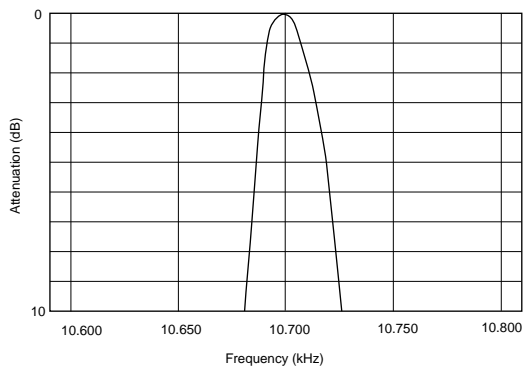


SFELA10M7LFTA01-B0

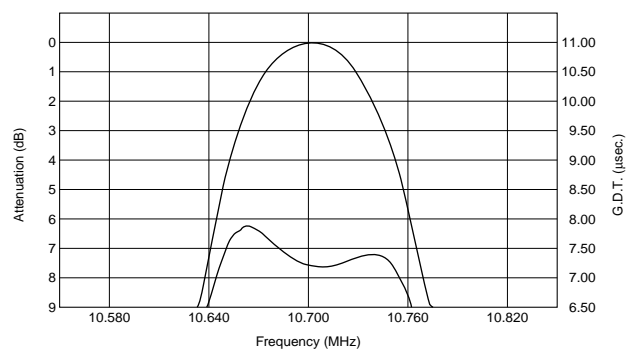

Continued on the following page. ↗

☐ Continued from the preceding page.

## ■ Frequency Characteristics

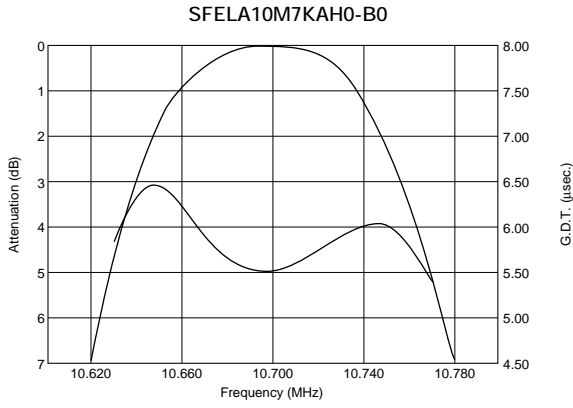

9

## ■ Frequency Characteristics (Spurious)

