

SPECIFICATION

- Part No. : **TG.10R.A.0113**
- Product Name : Triton 4G/3G/2G Terminal Antenna for Cellular Modules with Assisted GPS Hinged SMA(M)
- Feature : Dipole Terminal Antenna
Hinged SMA(M) Connector
Length 168mm, Φ 13mm
AntD© Shunt 10k Ohm Chip Resistor Inside
RoHS compliant



1. Introduction

The TG.10R Triton Dipole Antenna with AntD© Resistor – is primarily designed for use with CDMA modules with assisted GPS. It does not require a ground-plane to connect to. It has a quality robust PUS housing for use with wireless terminals. The antenna has a SMA(M) connector. It can be used straight or hinged 90 degrees. The antenna has a wide-band response and can also be used for other cellular and wireless applications such as GSM, LTE, UMTS, and WI-FI.

AntD© allows connected radio products using the latest cellular modules and recommended circuits from Telit and uBlox to perform diagnostics on the antenna. This includes detection that the proper antenna is connected and that the connection isn't shorted or broken. Contact Taoglas engineering for examples on how to implement AntD© antenna diagnostics in your product.

2. Specification


| ELECTRICAL | | | | | | | |
|---------------------------------------|----------------------------------|---------|---------|-------------|-------------|-------------|----------|
| Frequency (MHz) | 700~800 | 824~960 | 1575.42 | 1710 ~ 1880 | 1850 ~ 1990 | 1710 ~ 2170 | 2490~500 |
| Peak Gain (dBi) | | | | | | | |
| Straight | -0.5 | -0.5 | -0.5 | 1.0 | 2.0 | 1.5 | 3.0 |
| Bend | -1.5 | -3.0 | 1.5 | 2.5 | 2.5 | 2.5 | 4.0 |
| Efficiency | | | | | | | |
| Straight | 38% | 30% | 40% | 58% | 65% | 55% | 75% |
| Bend | 35% | 25% | 60% | 69% | 75% | 70% | 85% |
| Impedance | 50 Ω | | | | | | |
| Integrated AntD [©] Resistor | | | | | | | |
| Integrated Resistor | Shunt 10K Ohm (+/- 5%) to Ground | | | | | | |
| Polarization | Linear | | | | | | |
| Radio Pattern | Omni | | | | | | |
| Input Power | 50 W | | | | | | |
| MECHANICAL | | | | | | | |
| Dimensions | Length 168mm, Φ 13mm | | | | | | |
| Connector | Hinged SMA Male | | | | | | |
| Casing | PU | | | | | | |
| ENVIRONMENTAL | | | | | | | |
| Temperature Range | -40°C to 85°C | | | | | | |
| Humidity | Non-condensing 65°C 95% RH | | | | | | |

| LTE BANDS | | | |
|-------------|--|-------------------------------|---------|
| Band Number | LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA | | |
| | Uplink | Downlink | Covered |
| 1 | UL: 1920 to 1980 | DL: 2110 to 2170 | ✓ |
| 2 | UL: 1850 to 1910 | DL: 1930 to 1990 | ✓ |
| 3 | UL: 1710 to 1785 | DL: 1805 to 1880 | ✓ |
| 4 | UL: 1710 to 1755 | DL: 2110 to 2155 | ✓ |
| 5 | UL: 824 to 849 | DL: 869 to 894 | ✓ |
| 7 | UL: 2500 to 2570 | DL: 2620 to 2690 | ✓ |
| 8 | UL: 880 to 915 | DL: 925 to 960 | ✗ |
| 9 | UL: 1749.9 to 1784.9 | DL: 1844.9 to 1879.9 | ✓ |
| 11 | UL: 1427.9 to 1447.9 | DL: 1475.9 to 1495.9 | ✗ |
| 12 | UL: 699 to 716 | DL: 729 to 746 | ✓ |
| 13 | UL: 777 to 787 | DL: 746 to 756 | ✓ |
| 14 | UL: 788 to 798 | DL: 758 to 768 | ✓ |
| 17 | UL: 704 to 716 | DL: 734 to 746 (LTE only) | ✓ |
| 18 | UL: 815 to 830 | DL: 860 to 875 (LTE only) | ✓ |
| 19 | UL: 830 to 845 | DL: 875 to 890 | ✓ |
| 20 | UL: 832 to 862 | DL: 791 to 821 | ✓ |
| 21 | UL: 1447.9 to 1462.9 | DL: 1495.9 to 1510.9 | ✗ |
| 22 | UL: 3410 to 3490 | DL: 3510 to 3590 | ✗ |
| 23 | UL: 2000 to 2020 | DL: 2180 to 2200 (LTE only) | ✓ |
| 24 | UL: 1625.5 to 1660.5 | DL: 1525 to 1559 (LTE only) | ✓ |
| 25 | UL: 1850 to 1915 | DL: 1930 to 1995 | ✓ |
| 26 | UL: 814 to 849 | DL: 859 to 894 | ✓ |
| 27 | UL: 807 to 824 | DL: 852 to 869 (LTE only) | ✓ |
| 28 | UL: 703 to 748 | DL: 758 to 803 (LTE only) | ✓ |
| 29 | UL: - | DL: 717 to 728 (LTE only) | ✓ |
| 30 | UL: 2305 to 2315 | DL: 2350 to 2360 (LTE only) | ✓ |
| 31 | UL: 452.5 to 457.5 | DL: 462.5 to 467.5 (LTE only) | ✗ |
| 32 | UL: - | DL: 1452 - 1496 | ✗ |
| 35 | | 1850 to 1910 | ✓ |
| 38 | | 2570 to 2620 | ✓ |
| 39 | | 1880 to 1920 | ✓ |
| 40 | | 2300 to 2400 | ✓ |
| 41 | | 2496 to 2690 | ✓ |
| 42 | | 3400 to 3600 | ✗ |
| 43 | | 3600 to 3800 | ✗ |


*Covered bands represent an efficiency greater than 20%

3. Antenna Characteristics


3.1. Return Loss

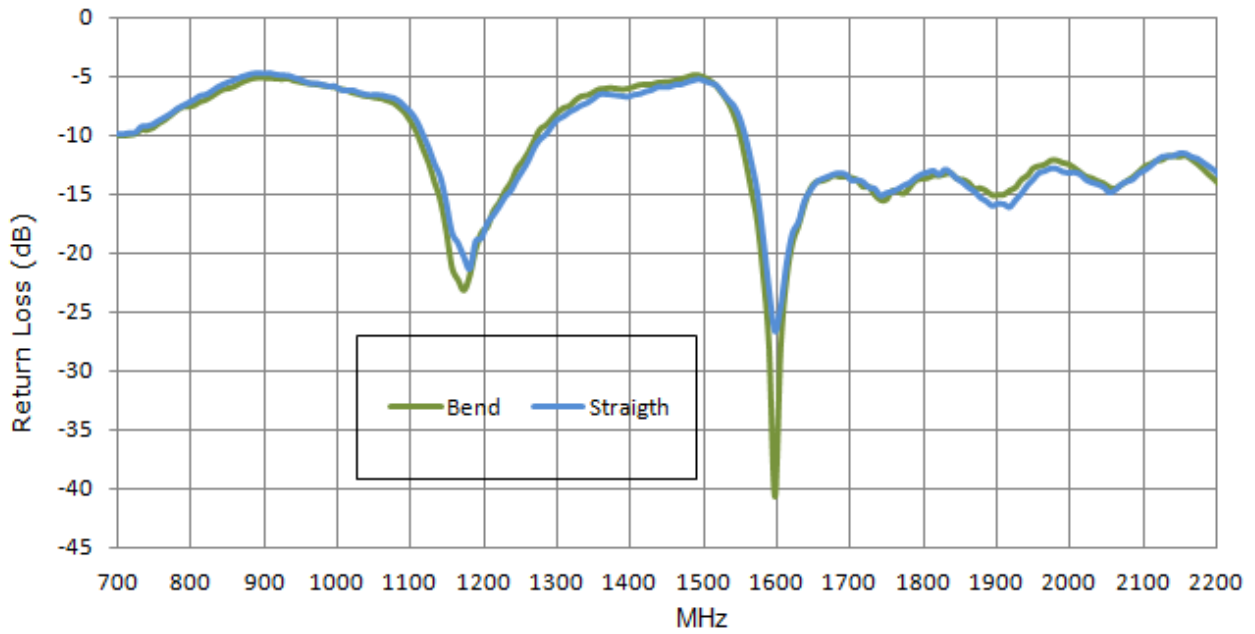

3.2. Antenna Efficiency

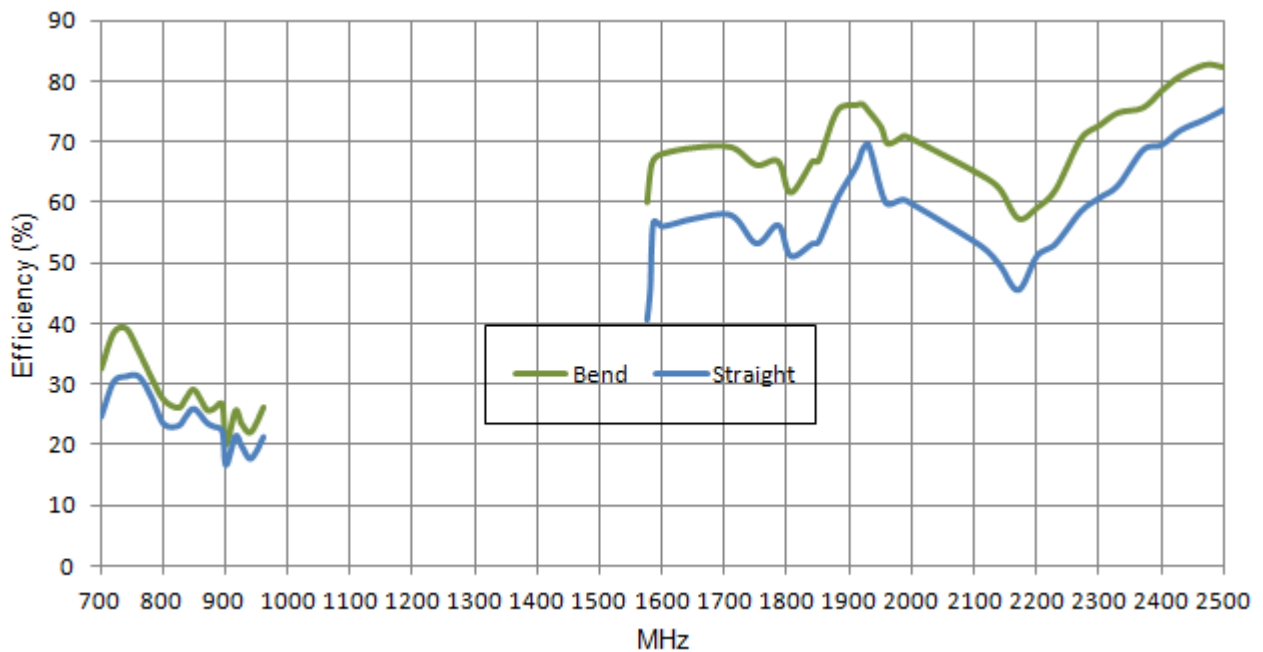


3.3. Peak Gain

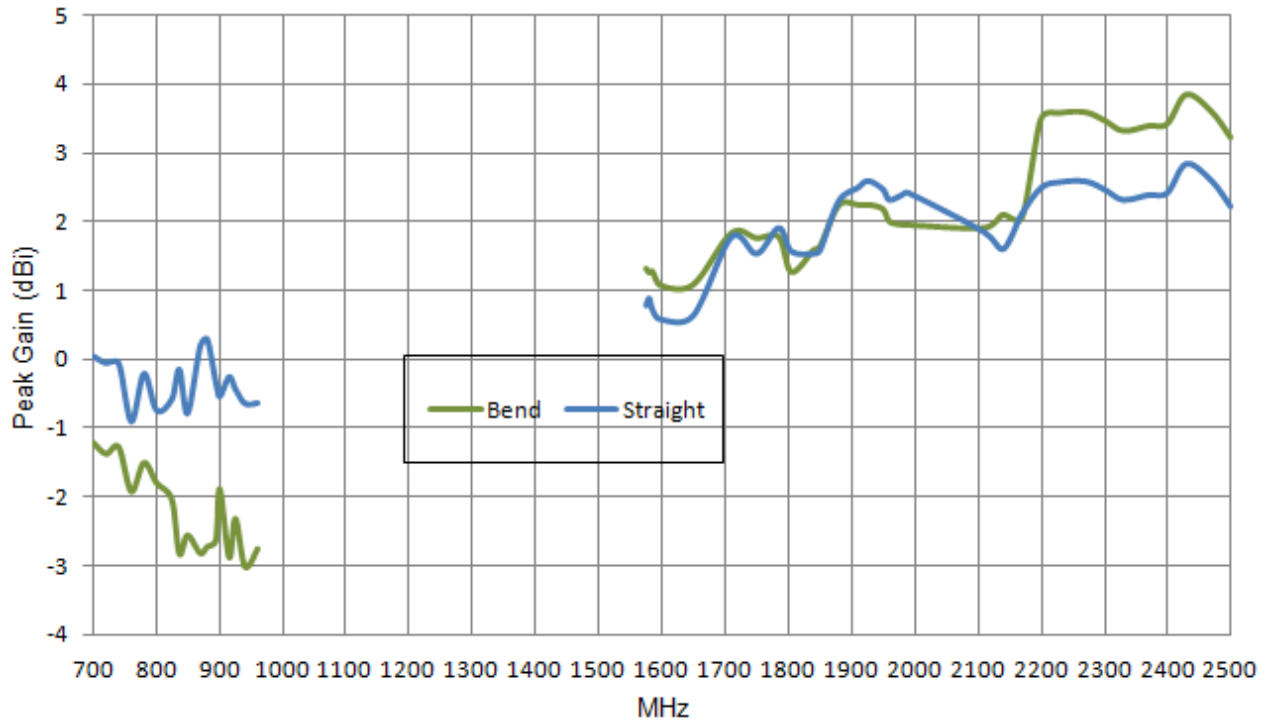


4. Antenna Radiation Patterns

4.1. Antenna setup

4.1.1. Straight

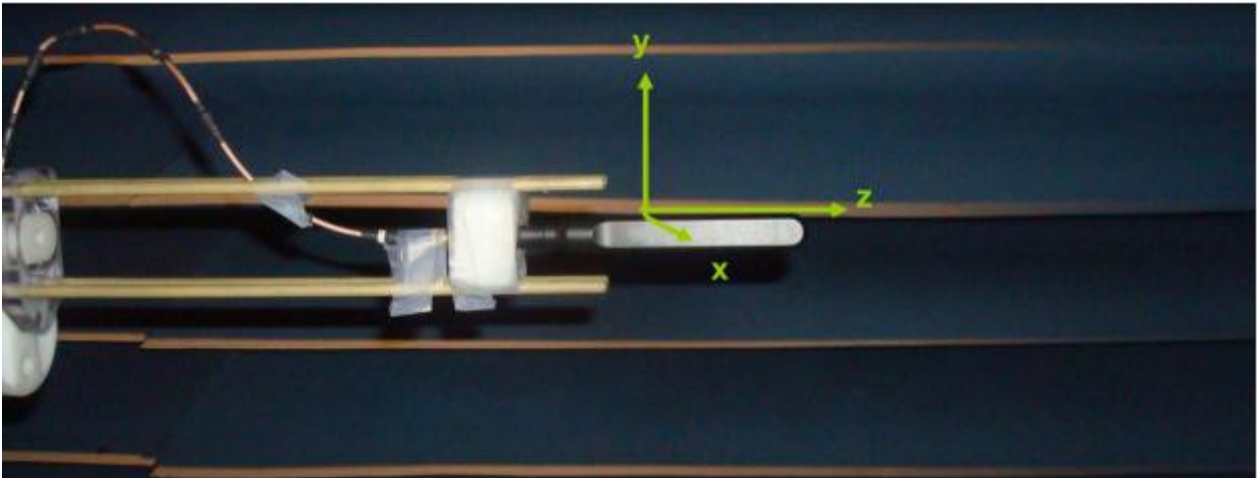

4.1.2. Bend

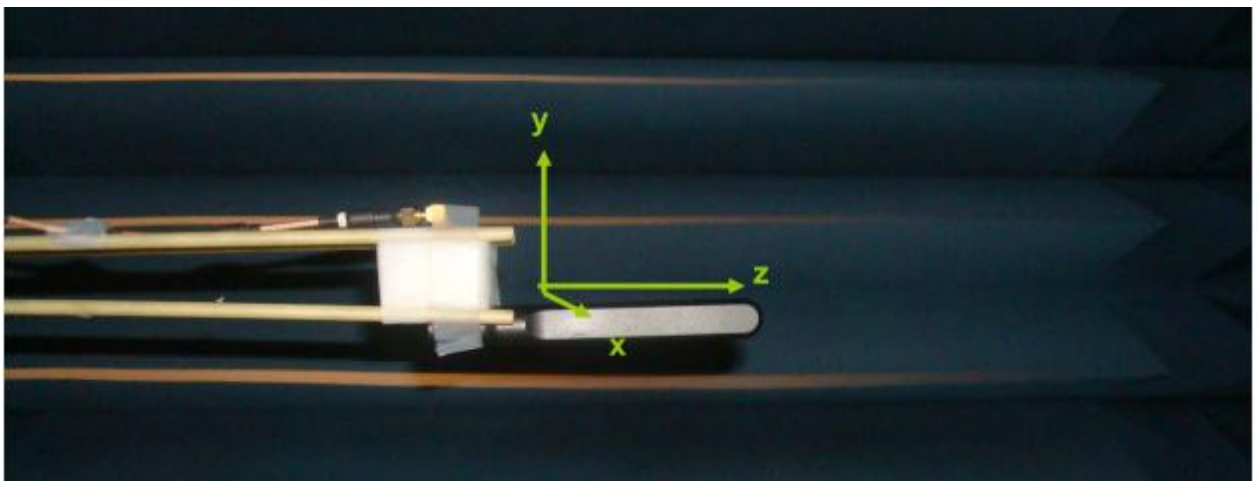

4.2. Radiation patterns

4.2.1. Straight (Cellular)

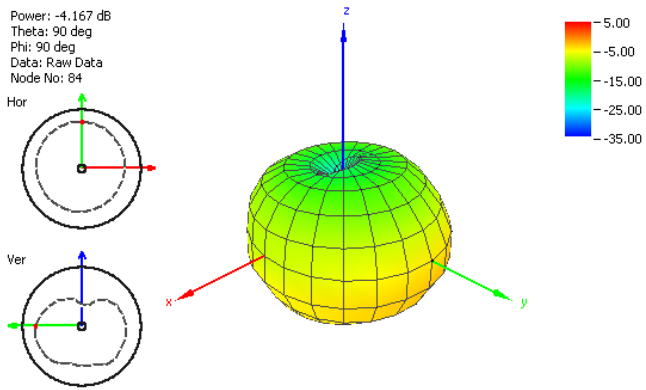


Figure 1. Radiation Pattern at 700 MHz

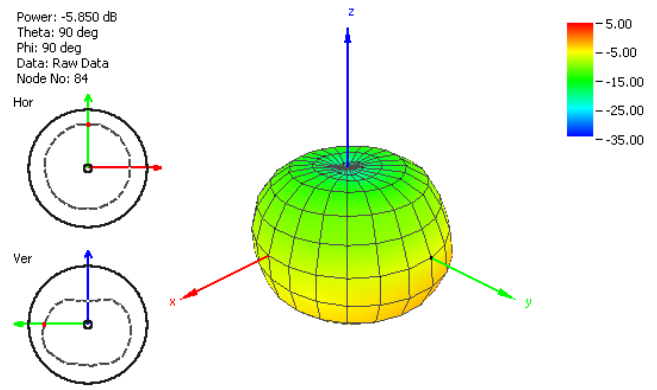


Figure 2. Radiation Pattern at 824 MHz

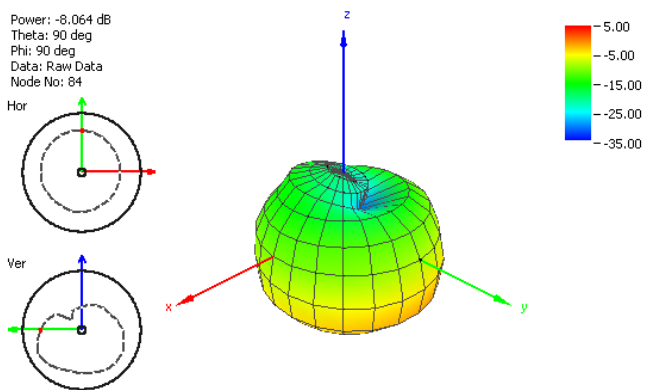


Figure 3. Radiation Pattern at 960 MHz

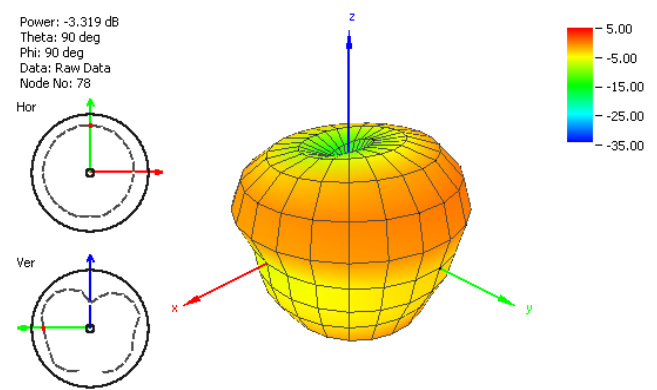


Figure 4. Radiation Pattern at 1700 MHz

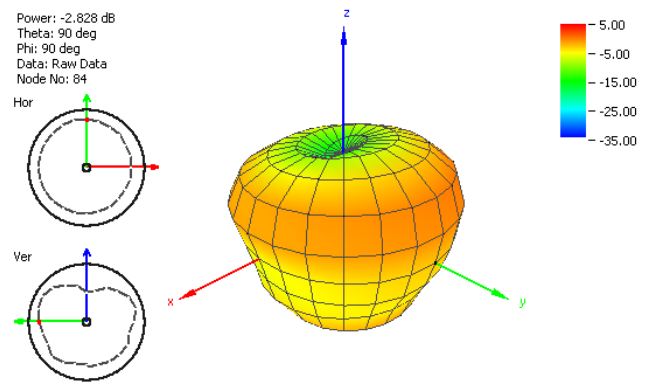


Figure 5. Radiation Pattern at 1800 MHz

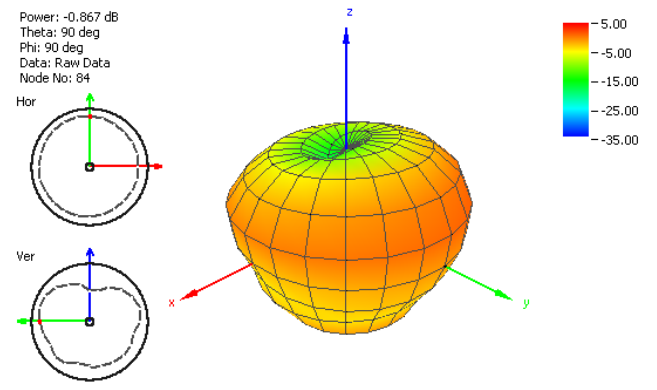


Figure 6. Radiation Pattern at 1910 MHz

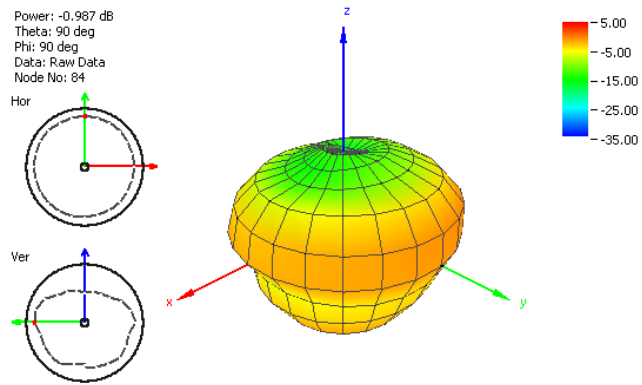


Figure 7. Radiation Pattern at 2170 MHz.

4.2.2. Straight (GPS & Wi-Fi)

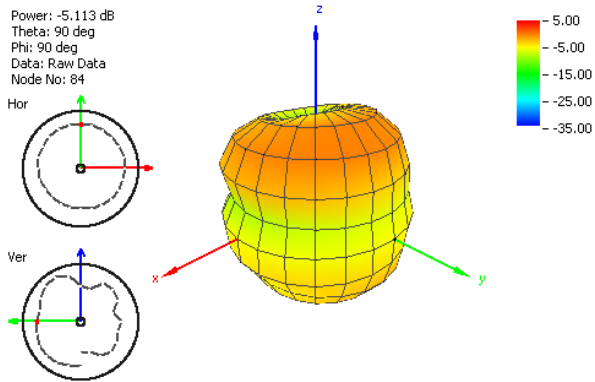


Figure 8. Radiation Pattern at 1575 MHz

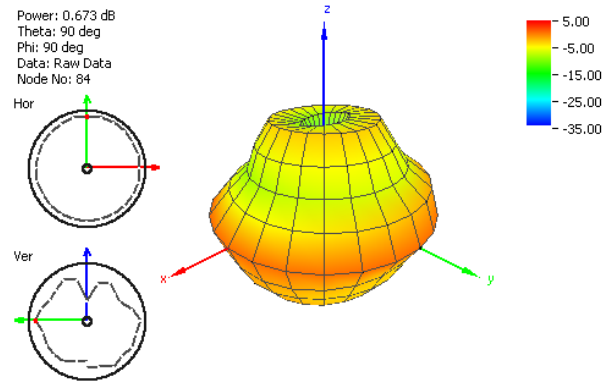


Figure 9. Radiation Pattern at 2400 MHz

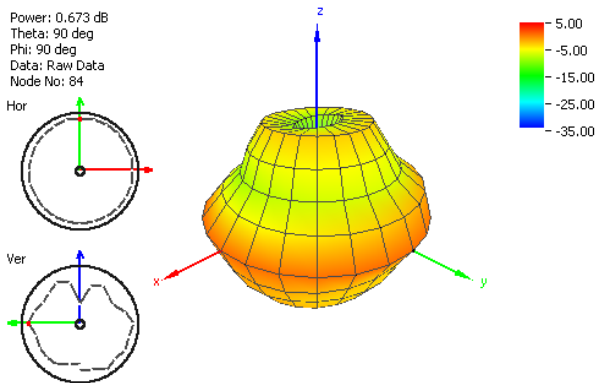


Figure 9. Radiation Pattern at 2400 MHz

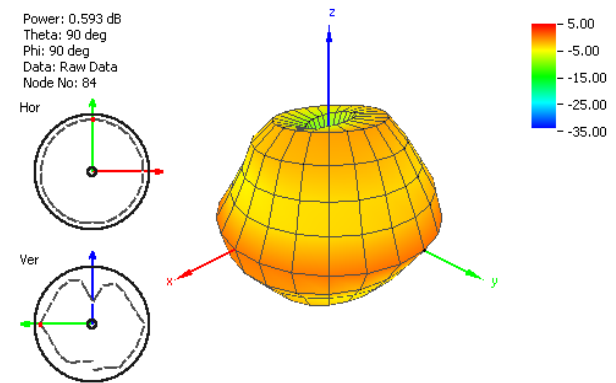


Figure 10. Radiation Pattern at 2460 MHz

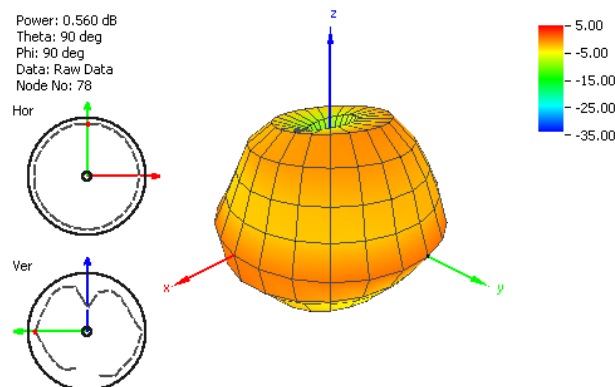


Figure 11. Radiation Pattern at 2460 MHz

4.2.3. Bend (Cellular)

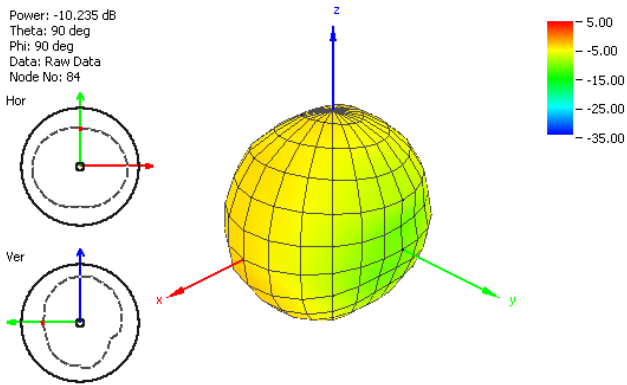


Figure 12. Radiation Pattern at 700 MHz

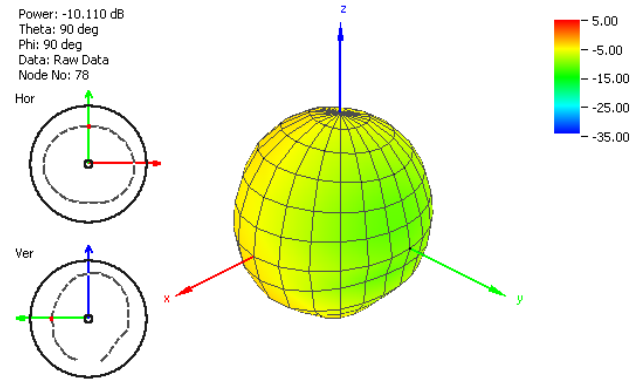


Figure 13. Radiation Pattern at 824 MHz

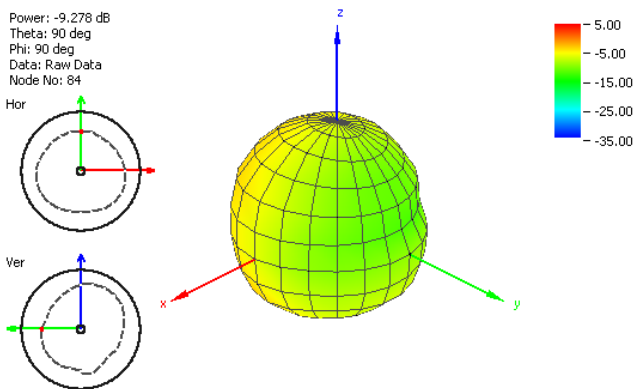


Figure 14. Radiation Pattern at 960 MHz

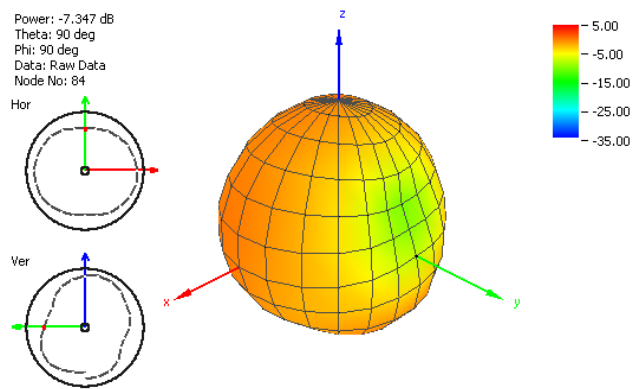


Figure 15. Radiation Pattern at 1700 MHz

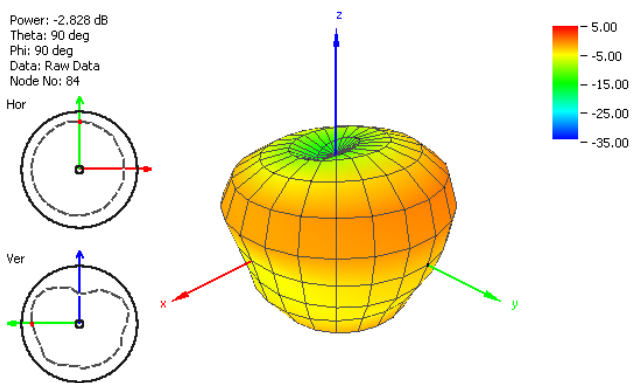


Figure 16. Radiation Pattern at 1800 MHz

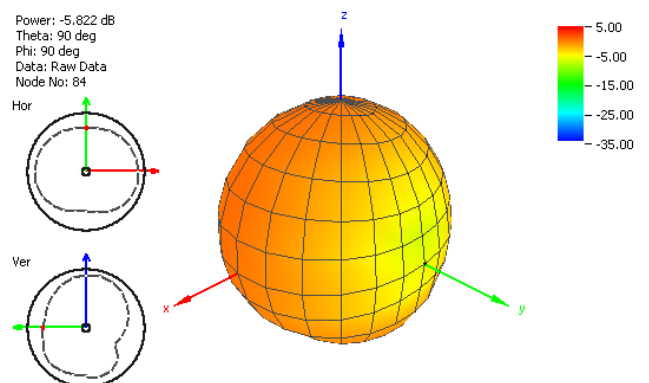


Figure 17. Radiation Pattern at 1900 MHz

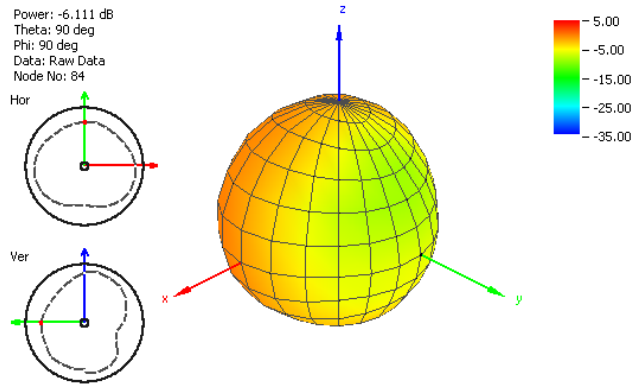


Figure 18. Radiation Pattern at 2200 MHz

4.2.4. Bend (GPS & Wi-Fi)

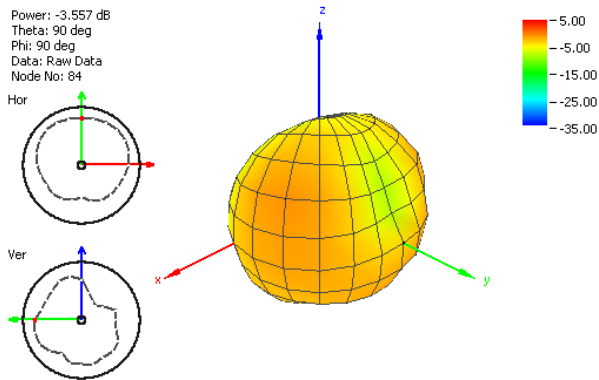


Figure 19. Radiation Pattern at 1575 MHz

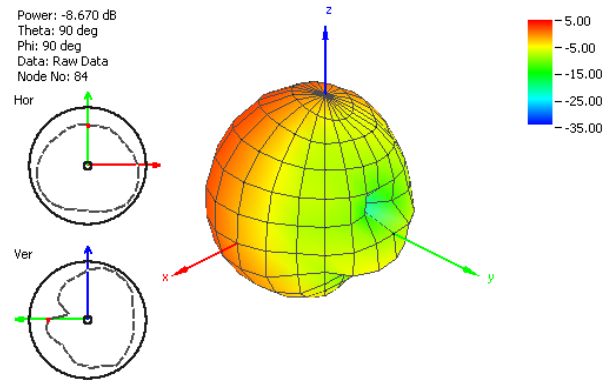


Figure 20. Radiation Pattern at 2400 MHz

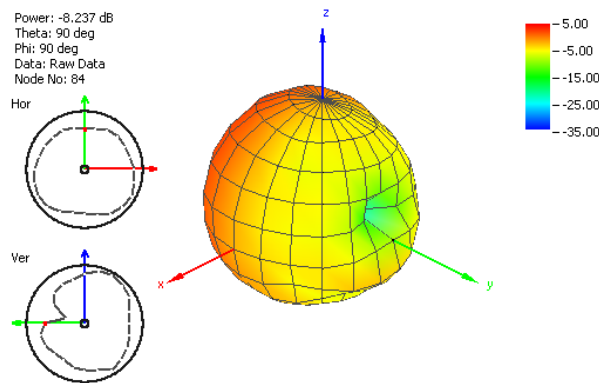


Figure 21. Radiation Pattern at 2460 MHz


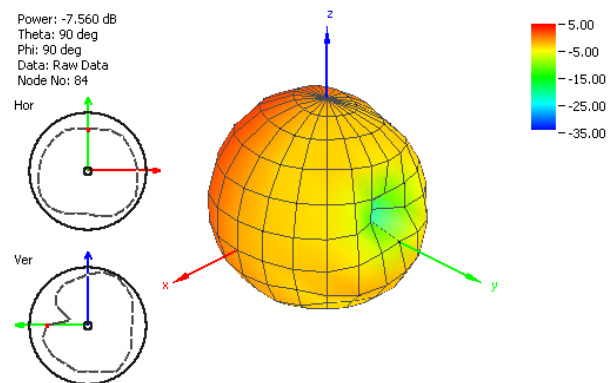



Figure 22. Radiation Pattern at 2500 MHz

5. Drawing

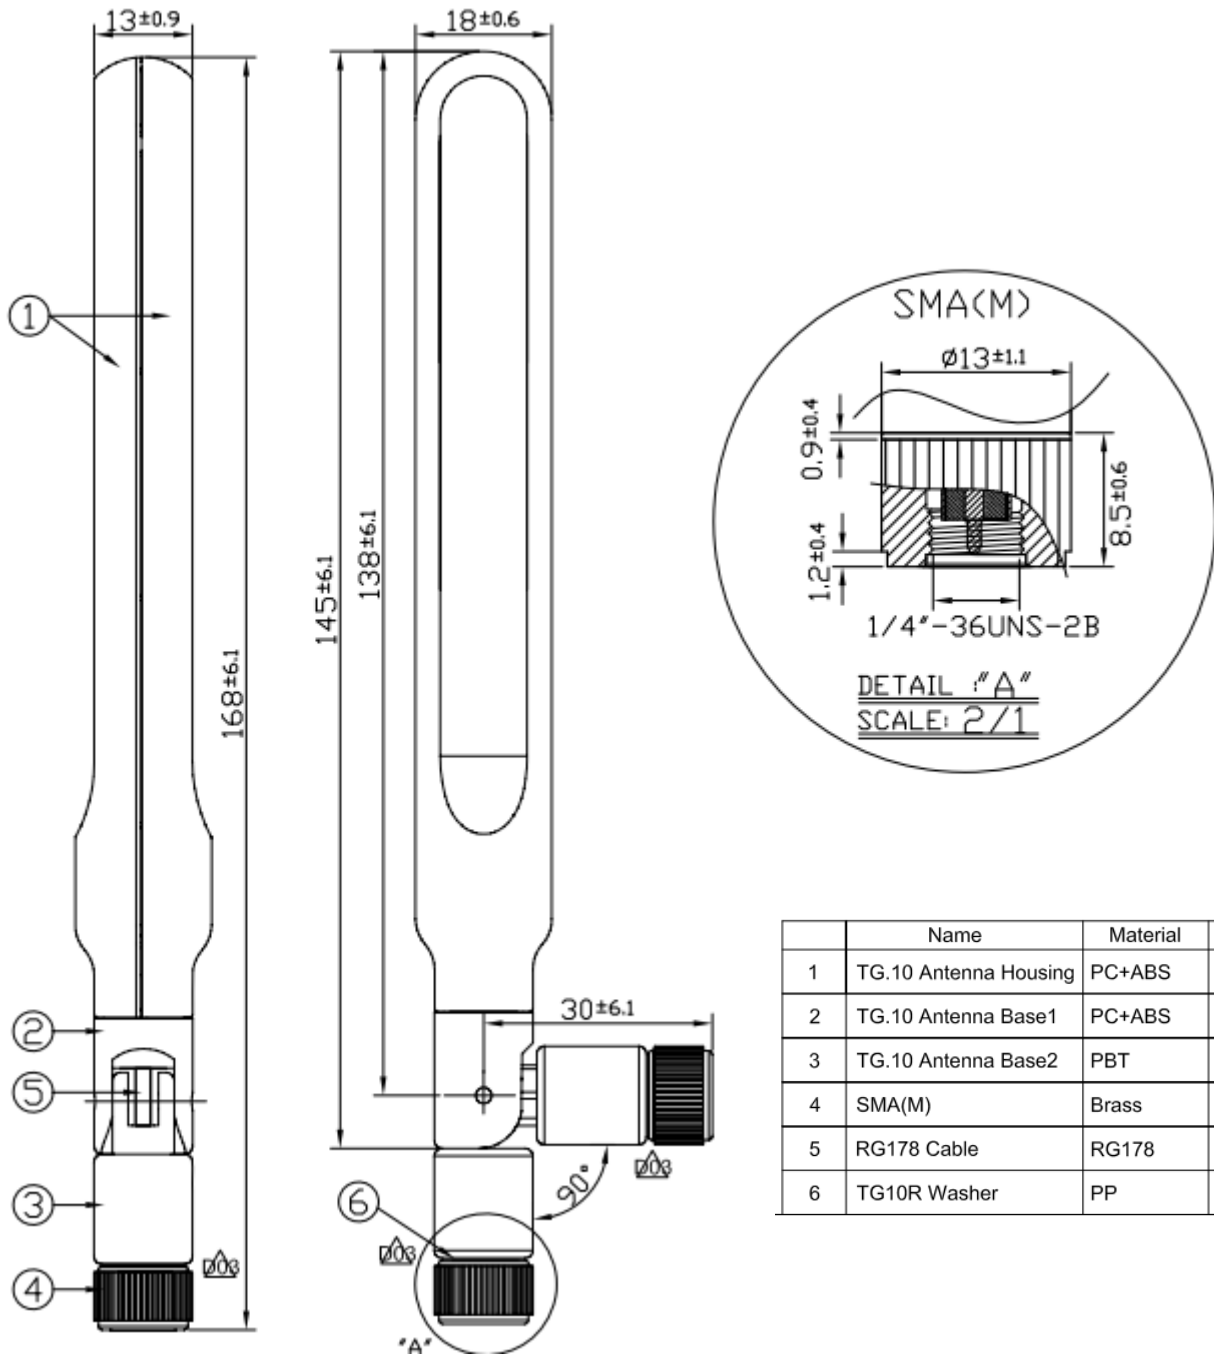


| | Name | Material | Finish | QTY |
|---|-----------------------|----------|--------|-----|
| 1 | TG.10 Antenna Housing | PC+ABS | Black | 2 |
| 2 | TG.10 Antenna Base1 | PC+ABS | Black | 1 |
| 3 | TG.10 Antenna Base2 | PBT | Black | 1 |
| 4 | SMA(M) | Brass | Black | 1 |
| 5 | RG178 Cable | RG178 | Brown | 1 |
| 6 | TG10R Washer | PP | Blue | 1 |

6. Packaging

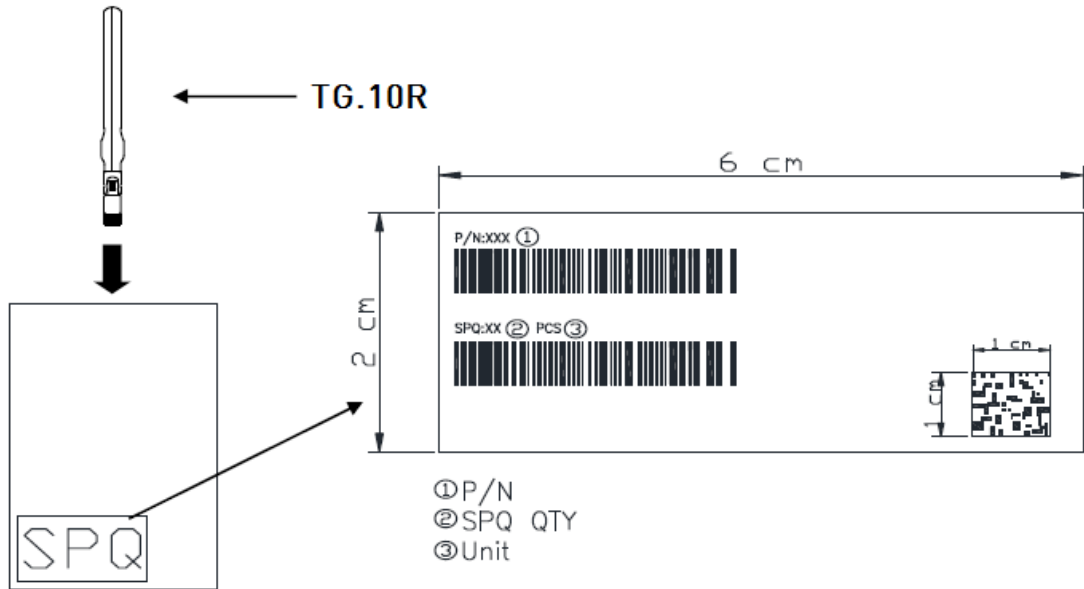

50 pcs per PE Bag (240*460mm)

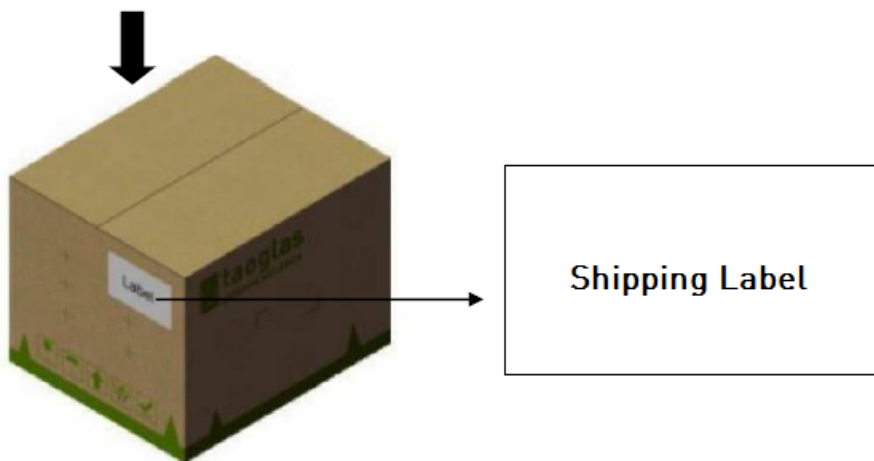

300 pcs per Carton
(400*330*220mm)

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.