

MODEL:

# SR2POST

## SmartRack® 45U 2-Post Open Frame Rack



45 Rack Units



800 lb.  
Stationary  
Load Capacity



Standard 19 in.  
Rack Width



Toolless  
Mounting Slots




Integrated  
Baying Tabs



Threaded (12-24)  
Mounting Holes

- A** Mounting Rails (2)
- B** Toolless Mounting Holes  
(for vertical PDUs or cable managers)

Also includes: Owner's manual, installation hardware, equipment-mounting hardware (28 12-24 washers, 28 12-24 screws) and cable management hooks.

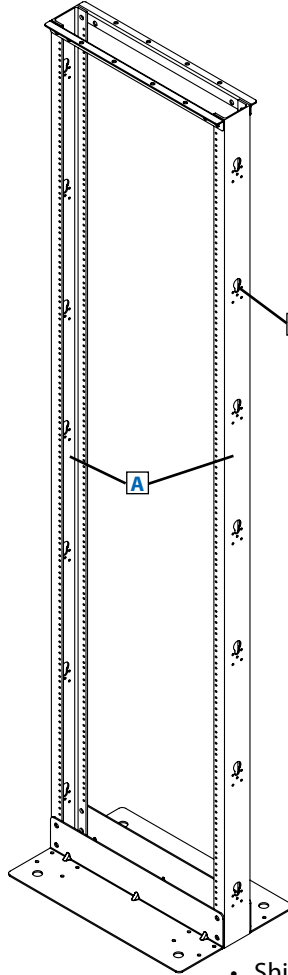

- Ships disassembled for easy transport and assembly in tight spaces
- Modular design optimized for quick configuration and reconfiguration
- Multiple units can be bolted together side by side
- Ideal for space-constrained or cost-conscious 19-inch rack-mount applications

### Specifications




Model	SR2POST
Rack Spaces	45U
Stationary Load Capacity	800 lb. (362.9 kg)
Unit Dimensions (H x W x D)	84 x 20.3 x 4.72 in. (2133.6 x 515.62 x 120.7 mm)
Shipping Dimensions (H x W x D)	7 x 3 x 85 in. (177.8 x 76.2 x 2159 mm)
Unit Weight	29 lb. (13.15 kg)
Shipping Weight	31 lb. (14.06 kg)
Standards	Tested to EIA-310-D, IEC 60297-3-100, RoHS



SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

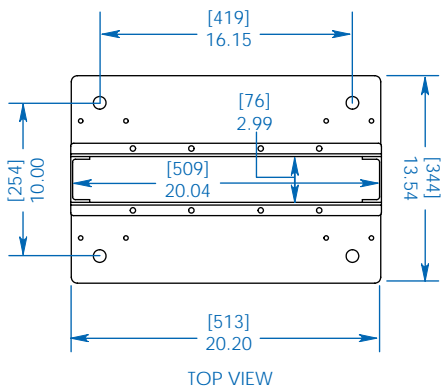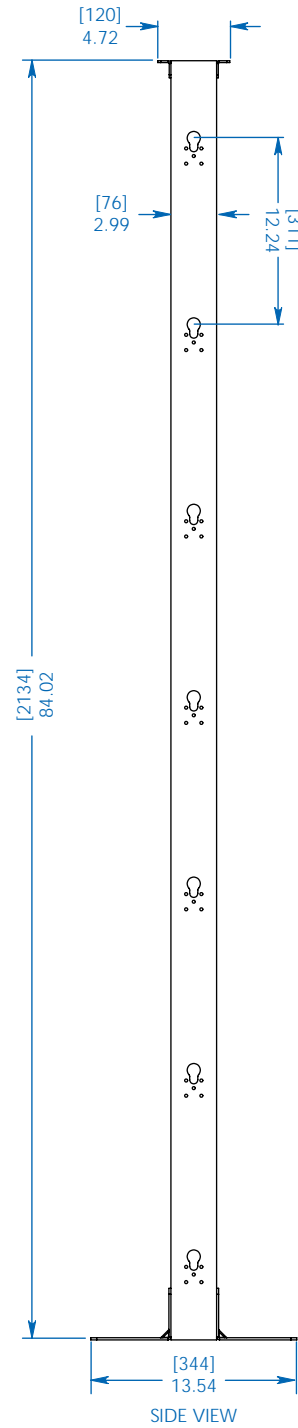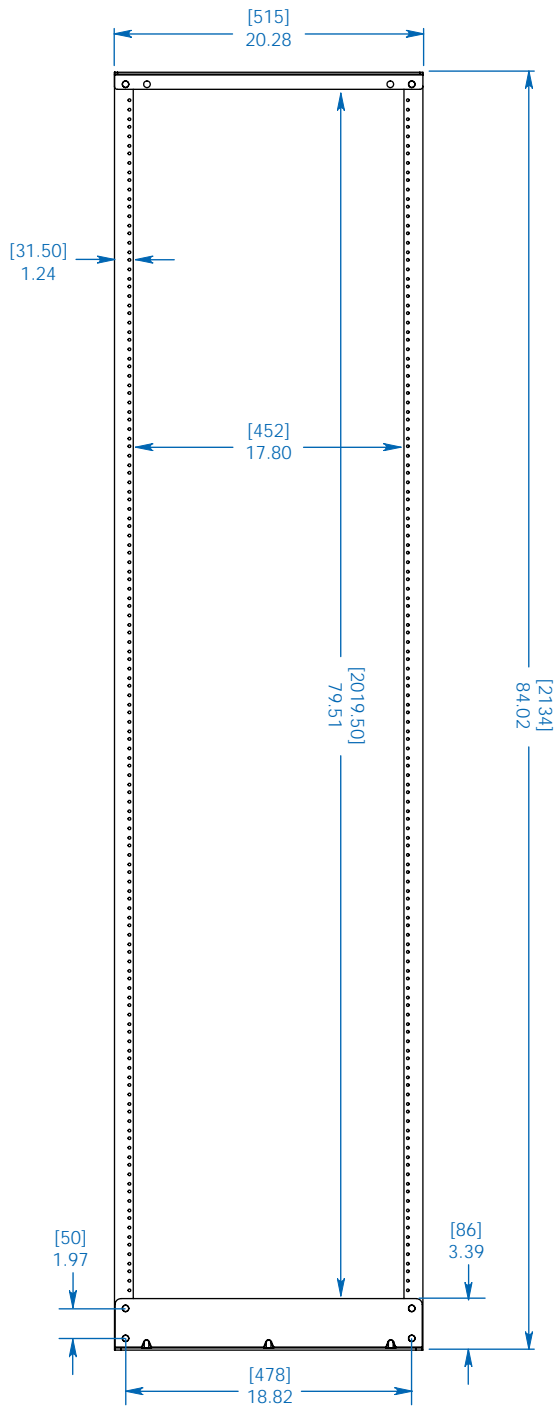

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**SR2POST**  
**TRIPP·LITE**

1111 W. 35th Street  
 Chicago, IL 60609 USA  
 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)