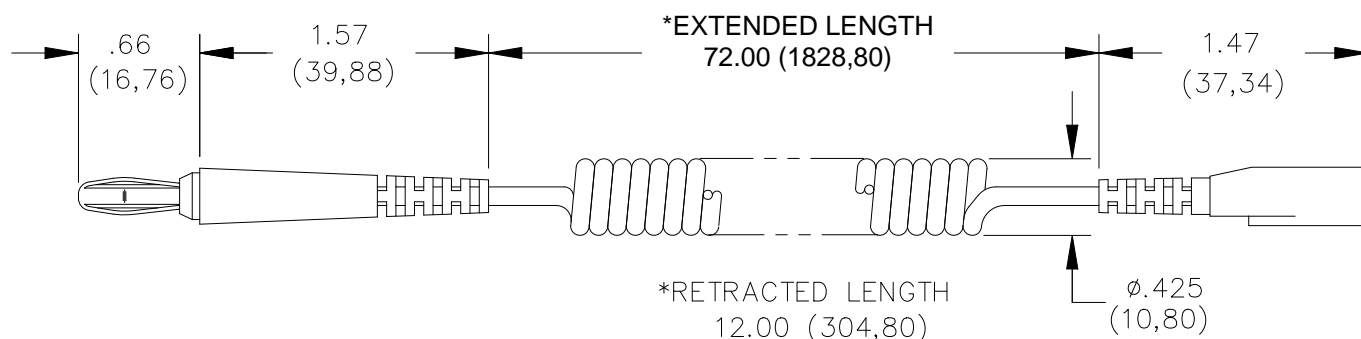


Model 5534
Static Control Ground Cord**Materials**

Connector: 1st End – Standard Banana Plug

Spring: Beryllium Copper Alloy QP2.0

Plug Body: Brass Alloy 87-75% Hard

Finish: Nickel-plated per QQ-N-290, Class 2, 150 microinches

Insulation: PVC, color: black

Coiled Cord – Coiled tinsel cord, 2 bundles, 7 tinsel of bare copper, Polyurethane jacket 2.25mm O.D.

Connector: 2nd End – 3.18 (1/8) Snap Receptacle – Brass

Finish: Nickel-plated

Insulation: PVC, color: black

Molded-In Resistor: 1 megohm \pm 10%, 1/4 Watt, Carbon Film

Ratings

Operating Temperature: +50°C (+122°F) Max

Ordering Information

Model: 5534

Static Control Ground Cord

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = \pm .02" (.51 mm),
.xxx = \pm .005" (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.